




CONVERTER



GR-1107/60V

Programmable
conventional LED
luminaire to emergency
LED luminaire converter

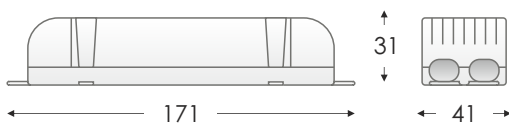

www.olympia-electronics.gr

The company is certified by:



for a safer world!



OlympiaElectronics Olympia Electronics OlympiaElectronics



CONVERTER

PRODUCED IN ACCORDANCE WITH:


EN 60598-1, EN 60598-2-22, EN 55015,
EN 61547, EN 61000-3-2, EN 61000-3-3

PROGRAMMABLE CONVENTIONAL LED LUMINAIRE TO EMERGENCY LED LUMINAIRE CONVERTER

GR-1107/60V

OPERATION VOLTAGE	200-250V AC/50-60Hz
MAXIMUM POWER CONSUMPTION	4.75W / 5VA
POWER FACTOR	>0.95
LED VOLT OUTPUT	12....58V DC
OUTPUT CURRENT	350mA maximum
MAXIMUM POWER OUTPUT	4W
CAPACITANCE OF BATTERIES	1.5Ah (B-973/HT), 3Ah (B-941/HT) in 4.8V selectable
CHARGING TIME	16 hours
CHARGING CURRENT	200mA for batteries 1,5Ah / 400mA for batteries 3Ah
AUTONOMY SELECTION	1.5h, 3h
EXTERNAL LED TYPE	4 to 20 external Led's in series
LED OUTPUT SHORT CIRCUIT PROTECTION	Included
EXTERNAL LED DRIVING TYPE	with constant current output
DEGREES OF COVER PROTECTION	IP 20
OPERATION TEMPERATURE RANGE ta	-10 to +45 °C
MAXIMUM COVER TEMPERATURE tc	60 °C
RELATIVE HUMIDITY (maximum)	90%
CONSTRUCTION MATERIALS	Bayblend Fr3010
GUARANTEE	3 years

CONNECTIONS

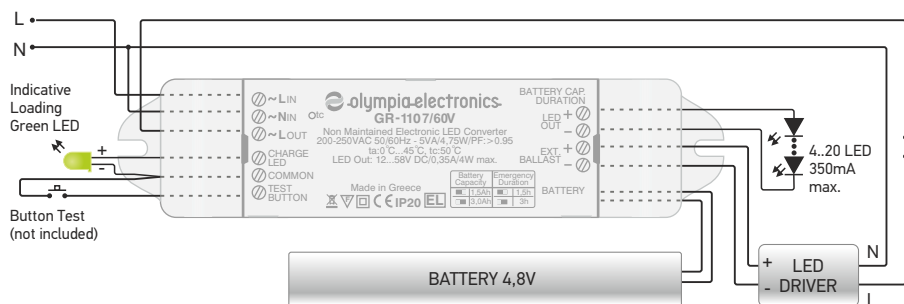

Distributor

www.olympia-electronics.gr

T. +30 23530 51200 | F. +30 23530 51486 | info@olympia-electronics.gr



OlympiaElectronics Olympia Electronics OlympiaElectronics