




EMERGENCY LIGHTING



NEW WEATHER LIGHT EMERGENCY LUMINAIRES

- ▾ High technology LED luminaires
 - ▾ Low consumption
 - ▾ Self-testing
- ▾ Up to 3 hours autonomy duration
- ▾ Maintained & non maintained operation
 - ▾ Suitable for open areas, corridors & escape marking sign
- ▾ Fault and battery charge LED indicators
 - ▾ Easy installation / mounting.

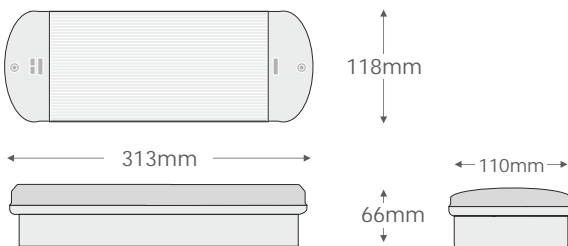

The company is certified by



for a safer world!



www.olympia-electronics.gr

0. +30 23530 51200 | f. +30 23530 51486 | info@olympia-electronics.gr







■ WATERPROOF SELF-TESTING MAINTAINED LED EMERGENCY LUMINAIRES 220-240V AC

TECHNICAL SPECIFICATIONS	GR-1938/15L 	GR-1938/30L 	GR-1939/15L 	GR-1939/30L 
BATTERY	3,6V/600mAh Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/3Ah Ni-Cd
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	3,8VA	4,9VA	3,7VA	5,6VA
LIGHT OUTPUT	105/105 lm	210/210 lm	105/105 lm	210/210 lm


TECHNICAL SPECIFICATIONS	GR-1938/4P	GR-1938/6P	GR-1939/4P	GR-1939/6P
BATTERY	4,8V/1,5Ah Ni-Cd	4,8V/3Ah Ni-Cd	4,8V/3Ah Ni-Cd	4,8V/4Ah Ni-Mh
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	5,1VA	6,5VA	5,7VA	6,5VA
LIGHT OUTPUT	175/350 lm	245/480 lm	175/350 lm	245/480 lm

■ NON-MAINTAINED LED EMERGENCY LUMINAIRES 220-240V AC WITH INTERNAL JUMPER SELECTED MAINTAINED OPTION

TECHNICAL SPECIFICATIONS	GR-1935/15L 	GR-1935/30L 	GR-1936/15L 	GR-1936/30L 
BATTERY	3,6V/600mAh Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/3Ah Ni-Cd
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	3,3VA	3,5VA	3,6VA	4,8VA
LIGHT OUTPUT	40/105 lm	40/210 lm	40/105 lm	40/210 lm

ACCESORIES

Self-adhesive legends below can be provided after order.



A-9100
Plastic double sided diffuser.

A-9100/ST
Plastic double sided diffuser for self-testing luminaires.



Distributor

www.olympia-electronics.gr

T. +30 23530 51200 | F. +30 23530 51486 | info@olympia-electronics.gr

