



# EMERGENCY LIGHTING



Ceiling mounting with extension rod



Hanging installation



Wall mounting



Vertical wall mounting

## NEW LED LIGHT BOX

- ▾ Maintained operation
- ▾ Autonomous duration 1,5 & 3 hours
- ▾ Multiple mounting methods

LLB-26	LLB-40	LLB-64		

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)



The company is certified by:



*for a safer world!*


European manufacturer





TECHNICAL CHARACTERISTICS	LLB-26	LLB-40	LLB-64
MAINS VOLTAGE	220-240V AC		
BATTERY	4.8V/1,2Ah NiMH	4.8V/1,2Ah NiMH - 4.8V/2Ah NiMH	4.8V/2Ah NiMH - 4.8V/4Ah NiMH
BATTERY PROTECTION	Overcharging and deep discharging protection		
INDICATIONS	Charge LED		
RECHARGING TIME	24h		
MINIMUM EMERGENCY DURATION	1,5h - 3h	1,5h - 3h	1,5h - 3h
LIGHT SOURCE INTENSITY (mains / emerg.)	230lm / 230lm	550lm / 550lm	600lm / 550lm
VIEWING DISTANCE	26m	40m	64m
DEGREES OF COVER PROTECTION	IP40		
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3, EN 1838		
OPERATION TEMPERATURE RANGE	5 to 40 °C		
RELATIVE HUMIDITY	Up to 95%		
CONSTRUCTION MATERIALS	Aluminium, ABS/PC, Plexiglass		
EXTERNAL DIMENSIONS (LxWxH)	287x205mm	432x280mm	670x400mm
GUARANTEE	3 years (1 year for the battery)		

#### Dimensions in mm

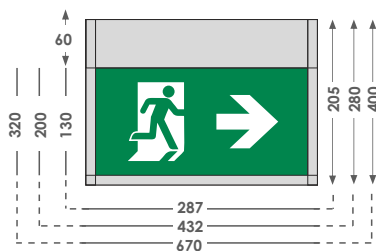

#### Marking direction legends



#### Accessories after order



*for a safer world!*

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | F. +30 23530 51486 | [info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)

Distributor



F-001-035