




## EMERGENCY LIGHTING



- | High technology LED
- | Easy installation / mounting
- | Low profile
- | High aesthetics
- | 90 minutes & 3 hours autonomy duration
- | Non maintained operation
- | Recessed & ceiling mounting

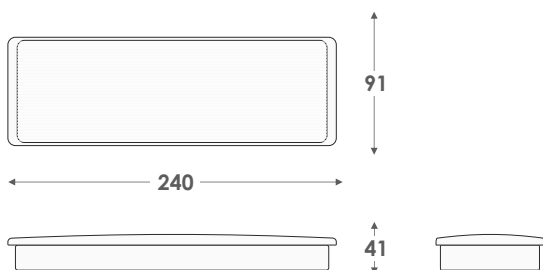

The company is certified by



*for a safer world!*



[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | f. +30 23530 51486 | [info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)



## TECHNICAL SPECIFICATIONS

### GRL-18/90

### GRL-19/180

VOLTAGE	220-240V AC/50-60Hz	
MAX. POWER CONSUMPTION	2,7W / 3VA	3W / 3,5VA
BATTERY (Ni-Cd)	3,6V/0,6Ah	3,6V/1Ah
INDICATIONS - CONTROLS	Battery charge indication LEDs, TEST button	
CHARGING TIME	24 hours	
MINIMUM AUTONOMOUS DURATION	1,5 hour	3 hours
ILLUMINATION SOURCE	12 white LED's	
ILLUMINATION (230V AC / emergency)	35lm / 85lm	32lm / 85lm
DEGREES OF COVER PROTECTION	IP 20	
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3	
OPERATION TEMPERATURE RANGE	5 to 40 °C	
RELATIVE HUMIDITY	Up to 95%	
CONSTRUCTION MATERIALS	Bayblend Fr3010, transparent polycarbonate	
EXTERNAL DIMENSIONS	240 x 90 x 44 mm	
TYPICAL WEIGHT	345gr.	350gr.
GUARANTEE	3 years (1 year for the battery)	



**olympia<sup>TM</sup>  
electronics**

SAFETY & SECURITY SYSTEMS

*for a safer world!*

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | f. +30 23530 51486 | [info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)

Distributor

F-001-016