




EMERGENCY LIGHTING



NEW ECO LIGHT EMERGENCY LUMINAIRES

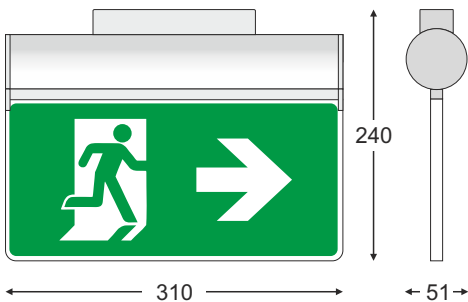

- ▼ Self-testing
- ▼ Maintained and Non-maintained operation
- ▼ Autonomous duration 3 hours
- ▼ Easy mounting

www.olympia-electronics.gr

The company is certified by:



for a safer world!

European
manufacturer



TECHNICAL CHARACTERISTICS

MAINS VOLTAGE	220-240V AC/50-60Hz
MAXIMUM POWER CONSUMPTION	2.7W / 3VA
BATTERY	3.6V/1.5Ah NiMH
BATTERY PROTECTION	Overcharging and deep discharging protection
INDICATIONS	Charge LED, Lamp Fault LED, Battery Fault LED
RECHARGING TIME	24h
MINIMUM EMERGENCY DURATION	3h
LIGHT SOURCE INTENSITY (mains / emerg.)	63lm / 125lm
VIEWING DISTANCE	30m
DEGREES OF COVER PROTECTION	IP40
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3, EN 1838
OPERATION TEMPERATURE RANGE	5 to 40 °C
RELATIVE HUMIDITY	Up to 95%
CONSTRUCTION MATERIALS	Aluminum, plexiglas
EXTERNAL DIMENSIONS (LxWxH)	310x240x51mm
TYPICAL WEIGHT	1090gr.
GUARANTEE	3 years (1 year for the battery)

Mounting Methods

Marking direction legends



Ceiling mounted



Flag mounted on a wall



(A-1133 requirement)

Hanging installation



(A-1130 or A-1131 or A-1132 requirement)

Surface mounting on a wall



for a safer world!

www.olympia-electronics.gr

T. +30 23530 51200 | F. +30 23530 51486 | info@olympia-electronics.gr

Distributor

